KIT AV

MAX. 120 KG




CARATTERISTICHE COSTRUTTIVE

- Molla in acciaio armonico UNI EN 10270-1 SH con superficie protetta da trattamento cataforetico.
- 2 placche formate da dischi in acciaio UNI EN 10111 DD13, zincati secondo UNI ISO 2081 Fe/Zn 12c1A, rivestiti in elastomero termoplastico con elevata resistenza alla lacerazione, all'invecchiamento atmosferico, all'ozono, ai detergenti, ai raggi UV e alle temperature da -45°C a +110°C.
- La molla, alloggiata all'interno delle placche, viene bloccata mediante adesivi speciali che assicurano il legamento con le placche.
- Le placche sono dotate di fori centrali filettati M8 per l'ancoraggio dell'antivibrante al basamento della macchina e/o verso terra disponibili anche in versione foro passante diam. 9 o 11 mm.
- Piastra base in acciaio UNI EN 10111 DD13, zincata secondo UNI ISO 2081 Fe/Zn 12c1A, dotata di 2 cavità per l'ancoraggio dell'antivibrante verso terra.
- La superficie delle placche presenta rilievi deformabili che consentono all'antivibrante caricato di stazionare per attrito e nel contempo ridurre la trasmissione di rumori.

MANUFACTURING CHARACTERISTICS

- Spring made of harmonic steel UNI EN 10270-1 SH with surface protected by cataphoretic treatment.
- 2 plates made of steel discs UNI EN 10111 DD13, galvanized according to UNI ISO 2081 Fe/Zn 12c1A, coated with elastomer with high resistance to tearing, ozone, hydrocarbons, organic grease, saline environments, detergents, UV rays, weathering and can be used in environments with temperatures range from -45°C to +110°C.
- The spring, housed inside the plates, is blocked by special adhesives.
- The plates are provided with M8 threaded central holes for anchoring the anti-vibration feet at the base of the machine and/or on the ground; available through hole diam. 9 or 11 mm.
- Steel base plate UNI EN 10111 DD13, galvanized according to UNI ISO 2081 Fe/Zn 12c1A, with 2 cavities for anchoring the mount to the ground.
- The surface of the plate and the base has slip-proof, flexible embossing which allow the charged anti-vibration feet to stand by friction and at the same time reduce the transmission of noise.



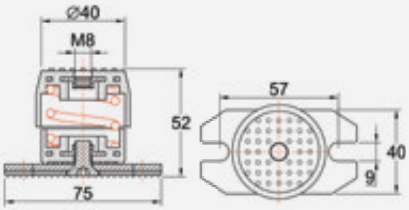

KIT CODE	MACHINE WEIGHT
AV55	up to 55 kg
AV80	up to 80 kg
AV120	up to 120 kg







CONTENUTO DEL BLISTER

- 4 piedini PMNaZc/Zb,
- 4 rondelle piane M8,
- 8 viti TE M8,
- brugola e istruzioni per l'installazione.

KIT CONTENTS

- 4 feet PMNaZc/Zb,
- 4 M8 washers,
- 8 HEX M8 screws,
- allen key and installation guide.