EasyCoat™

Acrylic protective coating for coils

EasyCoat™ is an acrylic coating aerosol, designed to guard air cooled coils against corrosive environmental factors such as acid rain, saline atmospheres and airborne ammonia. Its rapid-drying, waterproof, oil-resistant formulation ensures long-term protection for your air conditioning and refrigeration systems.

Specification

Name	EasyCoat
Product Code	EYCT1201
Packing Quantity	12 x 500ml
Packing Size (L x H x D) cm	21 x 25 x 27
Shipping Weight (Kg)	7.7
Shipping Volume (m3)	0.0145
Application	Acrylic coating for coils
Soils	N/A
Dilution (water:product)	NO
Contact Period	N/A
Rinse/Flush Required	NO
Special Features	Rapid Drying Waterproof Oil Resistant








Directions for use

Turn system off. Isolate electrics. Clean coil to remove all contamination and grease – even if coil is new. Ensure coil is dry before proceeding. Spray EasyCoat™ into coil, starting at top, then work methodically down and across. Wherever possible, treat both faces. EasyCoat™ contains a faint dye that allows easy verification of coating.

At each maintenance visit check coating is still intact. Reapply as required. If, due to multiple reapplication, the coating is decreasing heat transfer, request Advanced EasyCoat™ Cleaner to remove all EasyCoat™ – then start again.

Consult Safety Data Sheet for full safety information. Always wear suitable PPE.

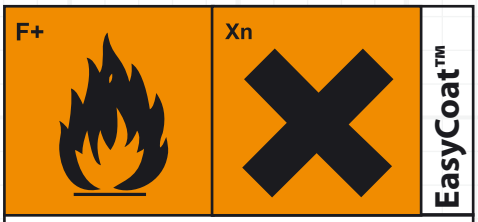

Extremely Flammable - Harmful
UN1950
Contains Toluene

R12: Extremely flammable. R38: Irritating to skin. R48/20: Harmful: danger of serious damage to health by prolonged exposure through inhalation. R65: Harmful: may cause lung damage if swallowed. R63: Possible risk of harm to the unborn child. R67: Vapours may cause drowsiness and dizziness. S1/2: Keep locked up and out of the reach of children. S36/37/39:Wear suitable protective clothing, gloves and eye / face protection. S38: In case of insufficient ventilation, wear suitable respiratory equipment. S62: If swallowed, do not induce vomiting: seek medical advice immediately and show this container or label. S33: Take precautionary measures against static discharges. S23: Do not breathe spray. S45: In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). S16: Keep away from sources of ignition - No smoking. Restricted to professional users.

This product should only be used by trained operatives. The "directions for use" are recommendations only; correct use will depend upon circumstances. To the extent permitted, no liability can be accepted for loss resulting from its use. Advanced Engineering follows a policy of continual product improvement. For this reason, some materials and specifications could change without notice.

Advanced Engineering Ltd
Guardian House, Stroudley Road
Basingstoke, Hants, RG24 8NL. UK
Tel: +44(0)1256 460300
sales@advancedengineering.co.uk
www.advancedengineering.co.uk