Haier

94L

190L

3S TANK NEW

Estimated Launch Date July 2024





200L



100L

A

Integrated Wi-Fi Control

Easy Installation


Heat Recovery

AC & Domestic Hot Water


- Intergrated Wi-Fi Control
- Easy Installation
- Heat Recovery
- AC & Domestic Hot Water

Indoor Unit	Model		AN100S2ST1FA	AN200S2ST1FA
Performance data				
Volume		L	94	190
Max. water Outlet temp.		°C	55 °C (75 °C with electrical heater)	
Electric heater power		W	2,000	
COP average Climate			2,2/ 2,3	2,4/ 2,5
COP warmer Climate			2.7	2.8
Seasonal Efficiency			M	L
Energy Class	EN16147(2017)		A	
Heating Time average Climate		h:mm	2:20/ 2:30	3:10/ 3:20
Heating Time warm Climate		h:mm	2:00/ 2:10	2:50/ 3:00
Power supply		Ph/V/Hz	1/220~240/50/60	
Interconnection cable		N x mm2	2*0.75	
Indoor Unit				
Net dimensions	WxDxH	mm	470x560x1110	520x610x1650
Packaging dimensions	WxDxH	mm	730x730x1285	730x730x1825
Net	(gross weight)	kg	45,0 (62,0)	70,0 (88,0)
Material			Enamel	
Installation data				
Liquid pipe	Ø	mm	6,35 (1/4)	6,35 (1/4)
Gas pipe	Ø	mm	9,52 (3/8)	9,52 (3/8)
Control				
Standard			Integrated	

AN100S2ST1FA

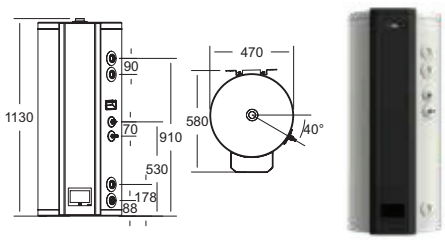

AN200S2ST1FA

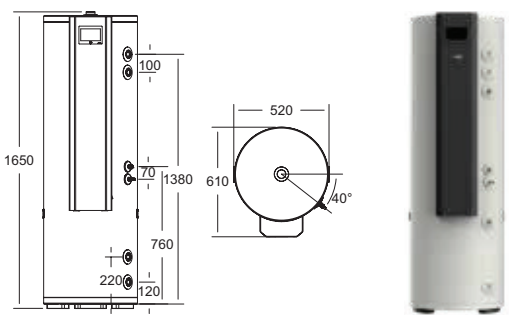

The data in this catalogue is purely indicative as the data may vary. Please be advised to check the accuracy of the data with the supplier before purchasing products.